

RENISHAW 

RMP600

Radio Machine Probe



The **Renishaw RMP600** High Accuracy Probe features an ultra compact design with optical radio transmission for medium to large machining and mill-turn centers.

Benefits

- Reduced set-up & calibration routines provide more time for machining cycles
- Improved process control and quality
- Reduced, rework, concessions and scrap
- Less operator intervention
- Long service life
- Fast to install & easy to use
- Used with automatic tool changers

Features

- Proven Rengage Strain Gage Technology offering .025 μ m repeatability at 2σ
- Secure Frequency Hopping, Spread Spectrum (FHSS) Technology
- Globally recognized 2.4GHz waveband — compliant with regulations in all major markets
- Sealed to IPX8 for use in the harshest machining environments
- Compact probe design (63mm \varnothing x 76.5mm long)
- Unrivalled performance on complex 3D shapes, ideal for 5-Axis machine tools
- Wide variety of shanks to fit nearly all machining centers



Specifications

Specifications


Primary application	Workpiece inspection and job set-up on multitasking machines, machining centers and gentry machining centers.
Sense directions	$\pm X \pm Y + Z$
Trigger force	XY 0.20 N / 20 gf (0.72 ozf) Z 1.90 N / 194 gf (6.83 ozf)
Stylus overtravel force XY plane (typical minimum) +Z direction (typical minimum)	2.80 N, 286 gf (10.07 ozf) 9.80 N, 999 gf (35.25 ozf)
Sealing	IPX8 (EN/IEC 60529)
Unidirectional repeatability	0.25 μm (10 μin) 2σ is valid for test velocity of 240 mm/min (9.45 ft/min) at stylus 50 mm (1.97 in) long. 0.35 μm (14 μin) 2σ is valid for test velocity of 240 mm/min (9.45 ft/min) at stylus 100 mm (3.94 in) long.

Battery Life (2 x AA 3.6 V lithiumthionyl chloride)

Stand-by Life	Continuous use
Dependent on switch-on/switch-off option	Dependent on switch-on/switch-off option
1300 days	230 hours

Renishaw Inspection Plus Software Cycles

- X or Y or Z single surface measure
- Web/pocket measure
- 4 point bore/boss measure
- Internal/external corner
- 3 point bore/boss vector measure
- Angled XY surface measure
- Holes on a pitch circle diameter (PCD) ie: Bolt hole patterns
- 4th axis measure. Can be modified for 4th and 5th axis applications
- Stock allowance
- Multi-stylus calibration with option to run multiple probes with different stylus angles
- Calibration on a ring or sphere available
- XYZ single surface vector measurement
- Optional software available for true 3D and form measurement

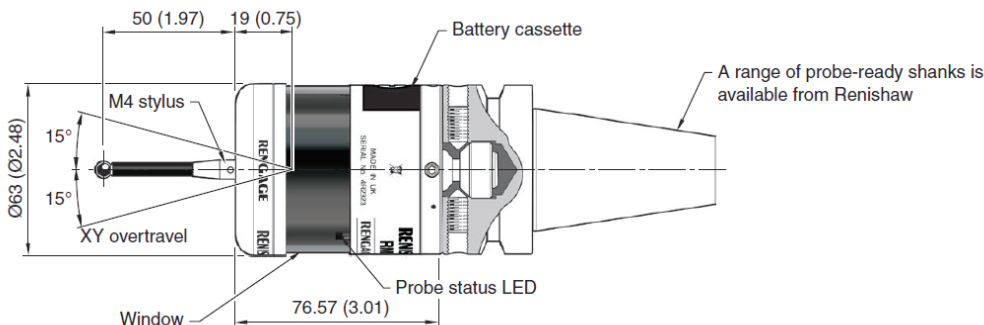

Productivity Quality, Inc.

15150 25th Avenue North, Suite 200
Plymouth, MN 55447
www.PQIProbing.com
(800) 772-0620

